
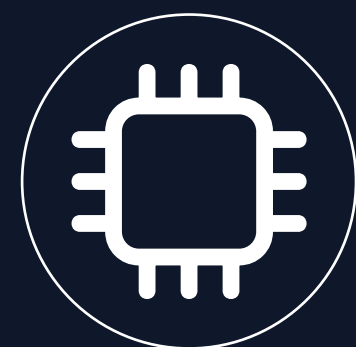


Panel Touch Display

PT21

- Featured a 21.5-inch display with up to 178° viewing angles;
- Industrial-grade screen, with a resolution of 1920×1080;
- Supports 10-point capacitive touch, same frequency without delay;
- Supports HDMI, VGA (Analog RGB), and DVI interface types;
- Optional wall-mounted installation or embedded Installation;
- -20°C to 60°C wide temperature operation, stable in harsh scenarios;
- With a durable metal body and an IP65-rated flat panel.

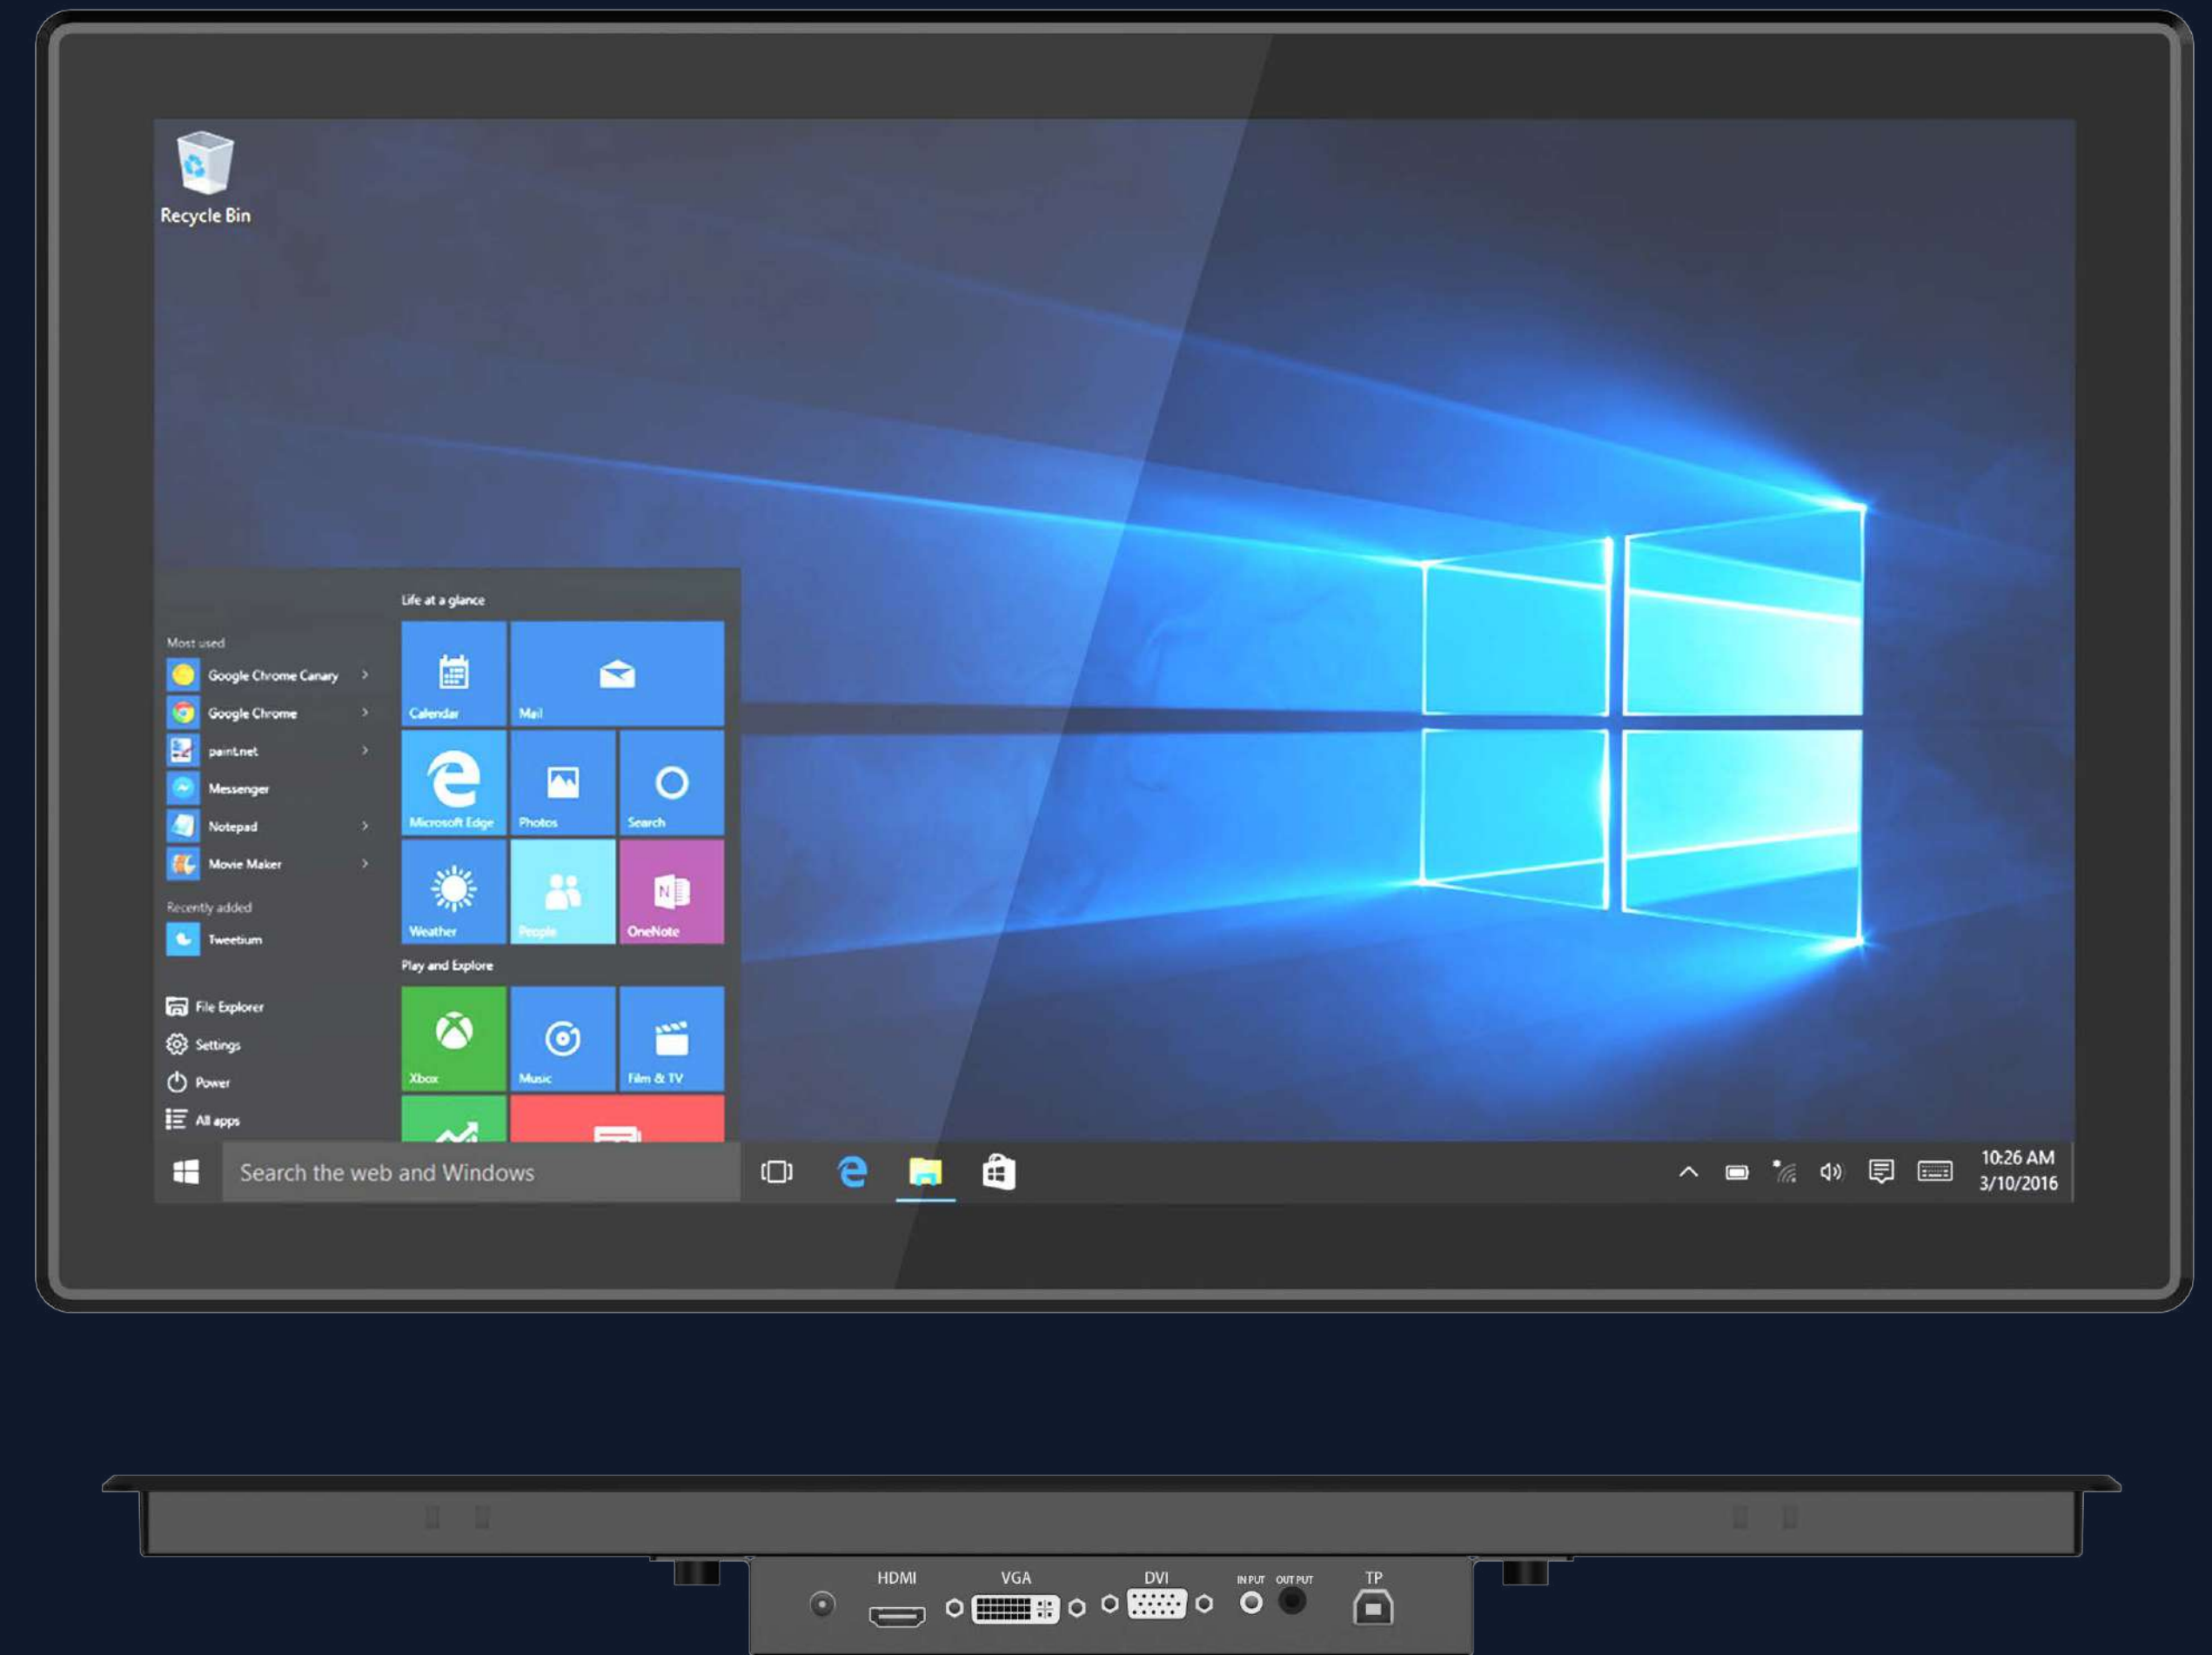

Realtek RTD25XX




21.5 inch screen



250cd/m²
Brightness



1920*1080
Screen resolution

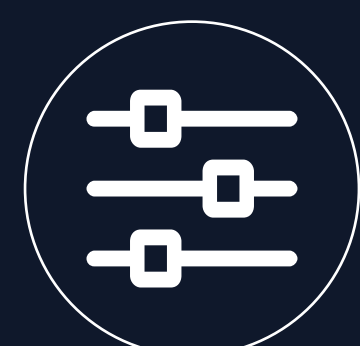

Rich interface
extensions



IP65

Panel Touch Display PT21

Specifications

 **CPU**
Realtek RTD25XX


 **Display**
Type: LCD
Size: 21.5 inch 16:9
Resolution: 1920x1080
Brightness: 250cd/m²


 **Touch Pannel**
10 point capacitive touch
(Optional without touch control)

 **Dimension/
Weight**
537.02x324.02x57.60mm
5.05kg

 **Product Color**
Black

 **Material**
Galvanized Sheet


 **I/O Interface**
Power Interface DC 12V *1
VGA *1 (Analog RGB)
USB TYPE B(TP Port)
ƒ 3.5mm Standard AUDIO Port *1
ƒ 3.5mm Standard Earphone Jack *1
DVI *1 (Up to 1920*1080@60Hz)
HDMI *1 (Up to 1920*1080@60Hz)

 **Rugged
Features**
Working temperature:
-20°C to 60°C
Storage temperature:
-30°C to 70°C
Humidity:
95% Non-Condensing

 **Certification**
IP65 Front Panel

Panel Touch Display PT21

Product Six Views

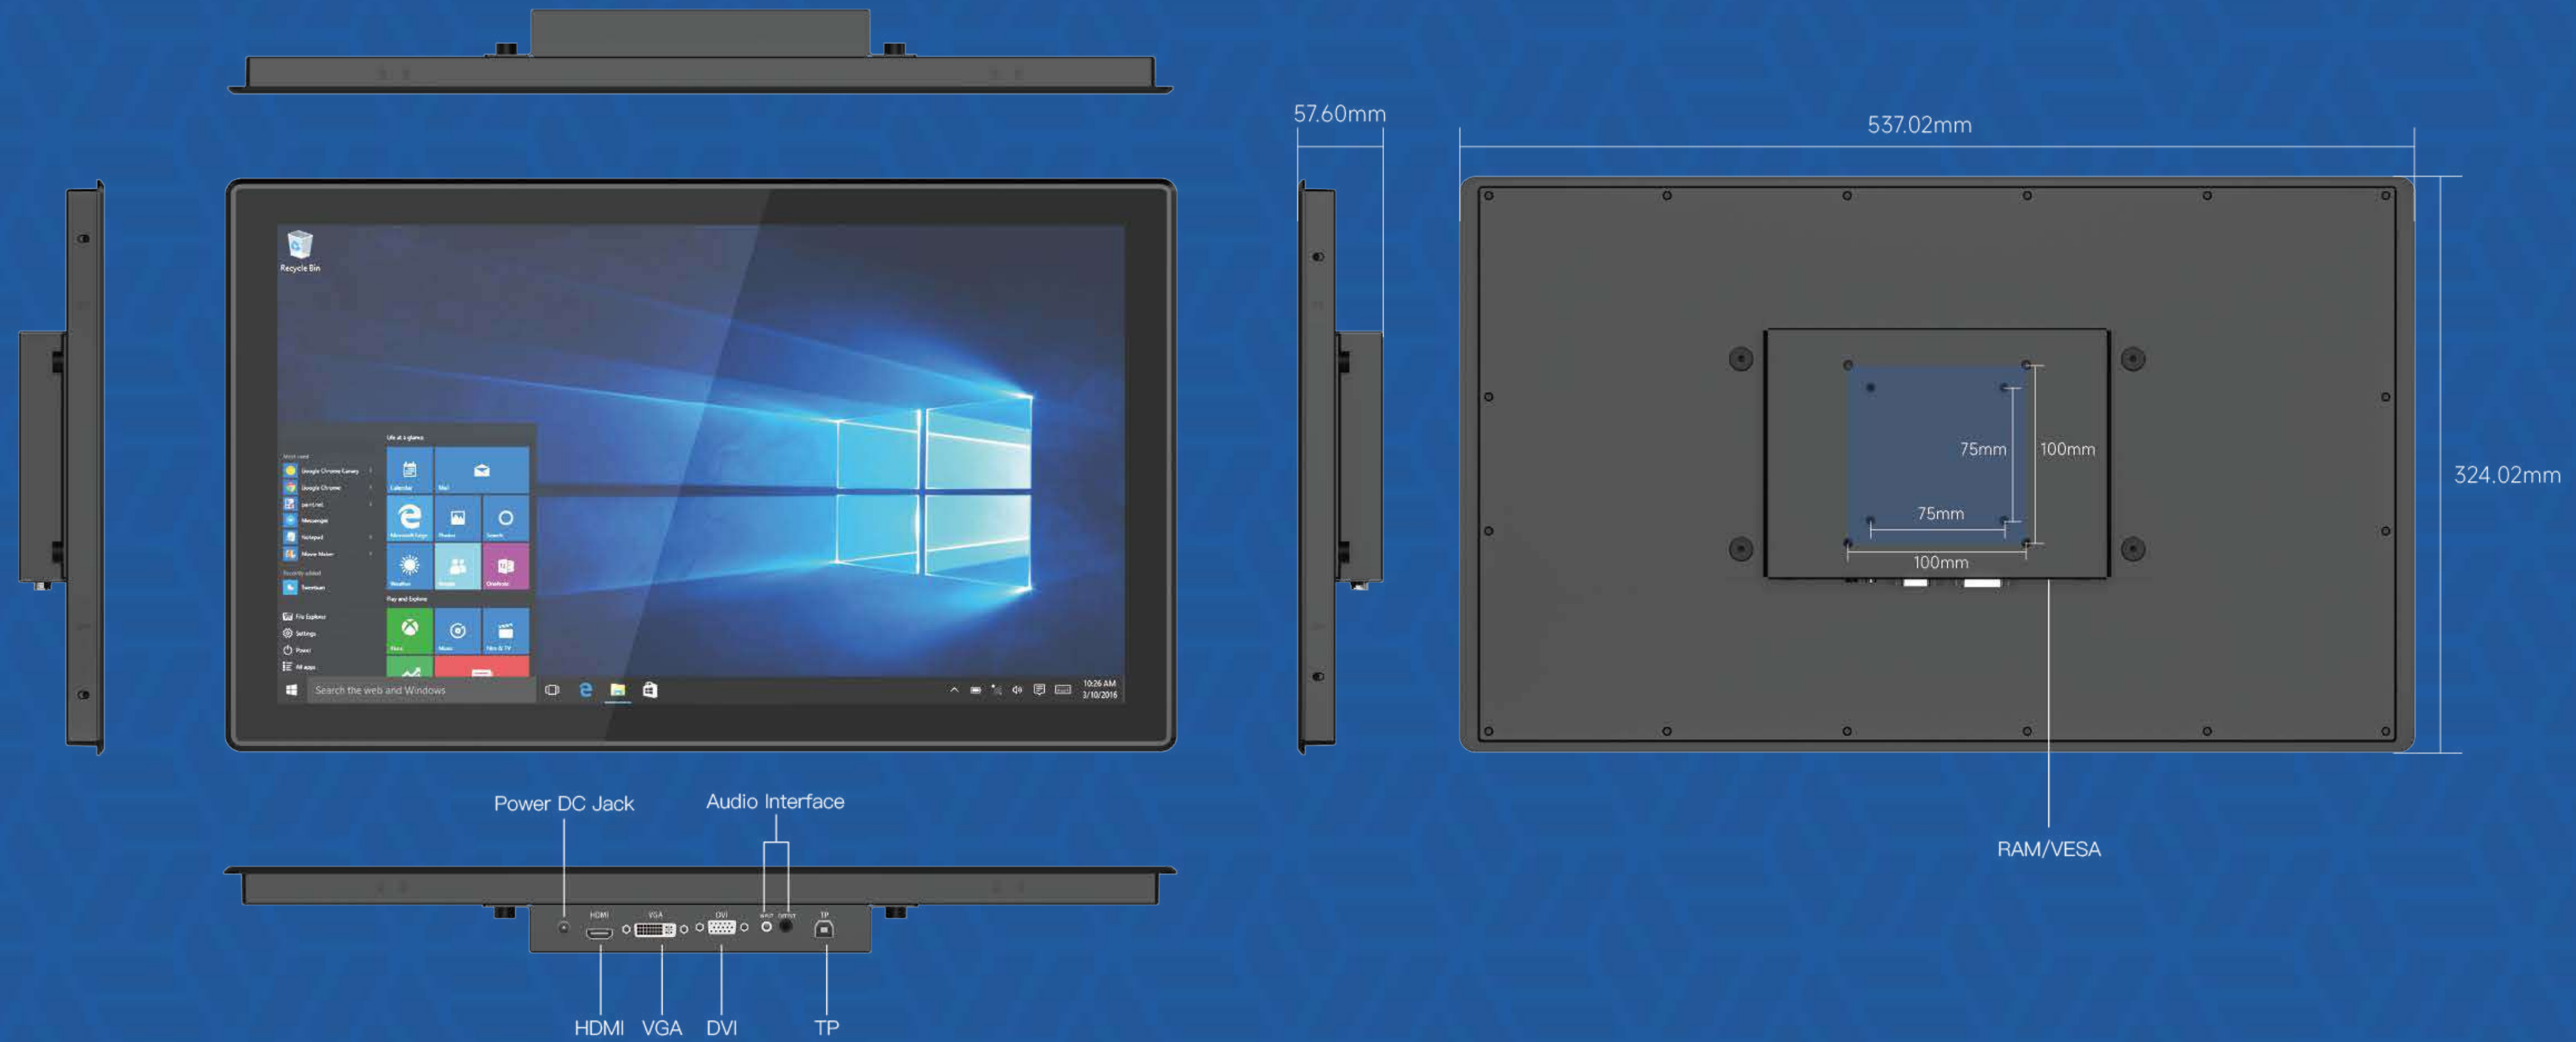

Accessories



12V/4A adapter



PPC_Hook assembly *4

* The technical specifications of this product are subject to change without prior notice